



*GE Power Controls*

**NEW**

## SP SDF in Sheet Steel Enclosure





## SP in SS

Type SP Switch Disconnecter Fuse Units in Sheet steel enclosures from GE Power Controls are compact and suitable for wide-spread applications. They are an ideal solution for both standalone distribution and motor control application. The range is available for BS type fuselinks (bolted version), DIN type fuselinks (blade contact) and clip-on type fuselinks. These are tested and certified to IS:13947-3/IEC 60947-3.

## Features &amp; Benefits:


- Wide range
  - Available from 32A to 400A in BS type, DIN type and Clip-on type fuselink version available in TPN Version.
- Tested and Certified
  - Conforms to IS:13947-3/IEC 60947-3.
- Safety
  - Door Inter Lock with defeat, pad locking neutral and earthing link as standard.
- Aesthetically Designed
  - Powder coated in CRCA sheet steel enclosures.
- Robust and Durable
  - The switches are housed in robust enclosure.

## Dimensional Details

	SP32/63	SP63	SP65	SP67
A	200	270	300	300
B	200	300	325	380
C	130	235	260	260
D	198	298	323	388
E	75	180	205	205
F	187	282	310	375
G	40	135	165	165
H	100	115	125	125
K	140	240	265	330
L	140	210	240	240
M	48	70	70	70

## Technical Particulars

	Switch Disconnecter Fuse Unit				
	SP32	SP63	SP65	SP67	SP67
Rated thermal current Ith (A)	32	63	125	250	400
Rated operational current Ie, AC 23A (A)	32	63	125	250	400
Rated operational voltage, Ue (V)	690	690	415	415	415
Rated Insulation voltage, Ui (V)	1000	1000	660	660	660
Maximum possible fuse rating (A)	32	63	125	250	400
Type reference of GE Fuselinks (Max.)	EIT NS 32	EIT, VSA, ES63	TSDS 125	TSF 250	TSMS 400
Mechanical operations	25000	25000	15000	10000	10000
Terminal capacity (in Sq. mm. Max.)	25	25	120	240	300

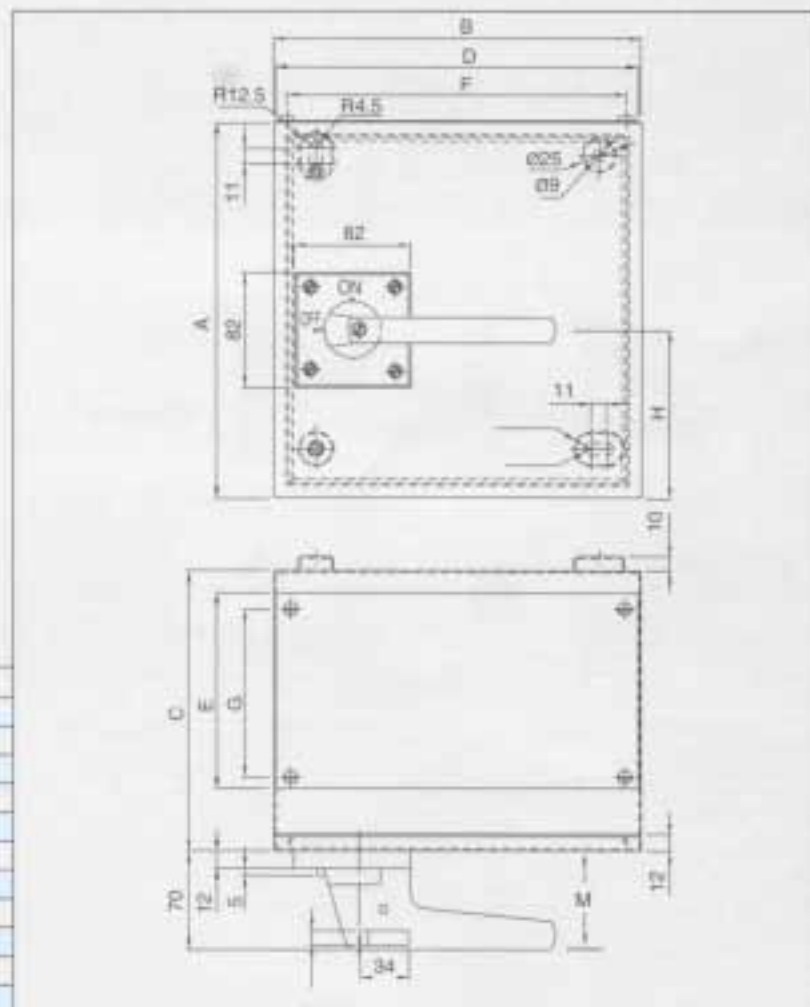

## GE Power Controls

**NORTH**  
38, 3rd Floor,  
Narasimha Building,  
15, Barakhamba Road,  
New Delhi-110 001  
Tel: 011-3752801, 81, 82  
Fax: 011-3752965  
Email: gpcnorth.sales@ymail.ge.com

**SOUTH**  
Temple Towers,  
6th Floor, 478, Anna Salai,  
Madurai.  
Dharm - 600035  
Tel: 044-4329178/80, 4353776/769  
Fax: 044-4327225  
Email: gpcsouth.sales@ymail.ge.com

**EAST**  
Bogal House,  
4th Floor, 129, Park Street,  
Calcutta - 700017  
Tel: 033-2282106/2161007  
Fax: 033-2161002  
Email: gpcwest.sales@ymail.ge.com

**WEST**  
Mahalaxmi Egg Estate,  
Block No. 871,  
3rd Floor, Laxmi Jeevanji,  
1st Cross Road, Malin,  
Mumbai - 400016  
Tel: 022-4448570 Fax: 022-4442621  
Email: gpcwest.sales@ymail.ge.com

**Head Office:**  
GE Power Controls India Private Limited  
110006, Balaji Complex  
A.M. Industrial Estate  
Goregaon (East), Near Road  
Bangalore-560 088  
Ph: +91 (080) 572 5129 / 40 / 41  
Fax: +91 (080) 572 4946  
E-mail: gpc.com.products@ymail.ge.com